




Belt Curve



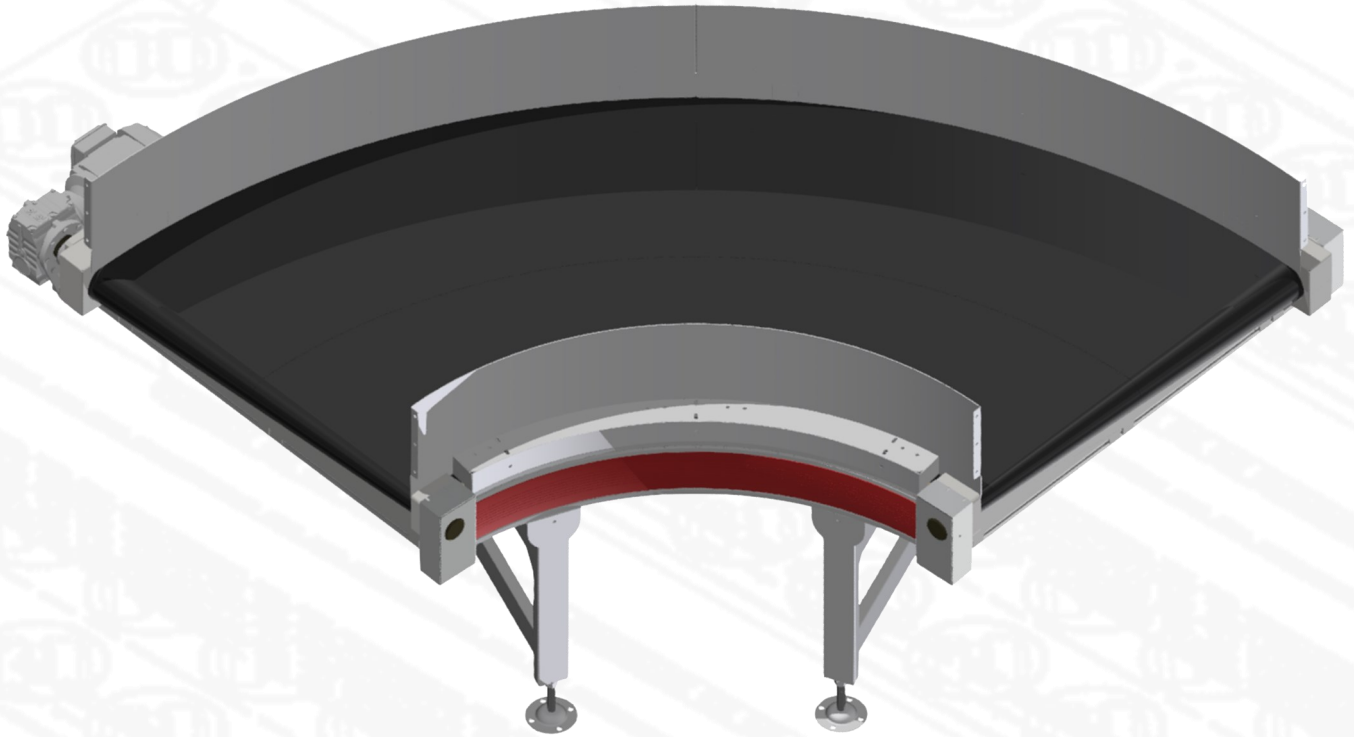

Bidirectional

Up to 3 m/s

Low noise level

**Short delivery
time**


Models:

- Belt Curve FB1:
- Belt Curve FB2:



Belt Curve FB1


- ♦ Applications: Logistics/End-of-line
- ♦ Bidirectional
- ♦ Capacity: max. 50 Kg
- ♦ Speed: max. 2 m/s
- ♦ Aluminium structure
- ♦ Gearmotor: optional
- ♦ Side guides: optional
- ♦ Support stands: optional
- ♦ Useful width: 620 - 720 - 820 - 920 - 1020 mm
- ♦ Rubberized conical drums
- ♦ Rotation angle: 30 - 45 - 60 - 90°

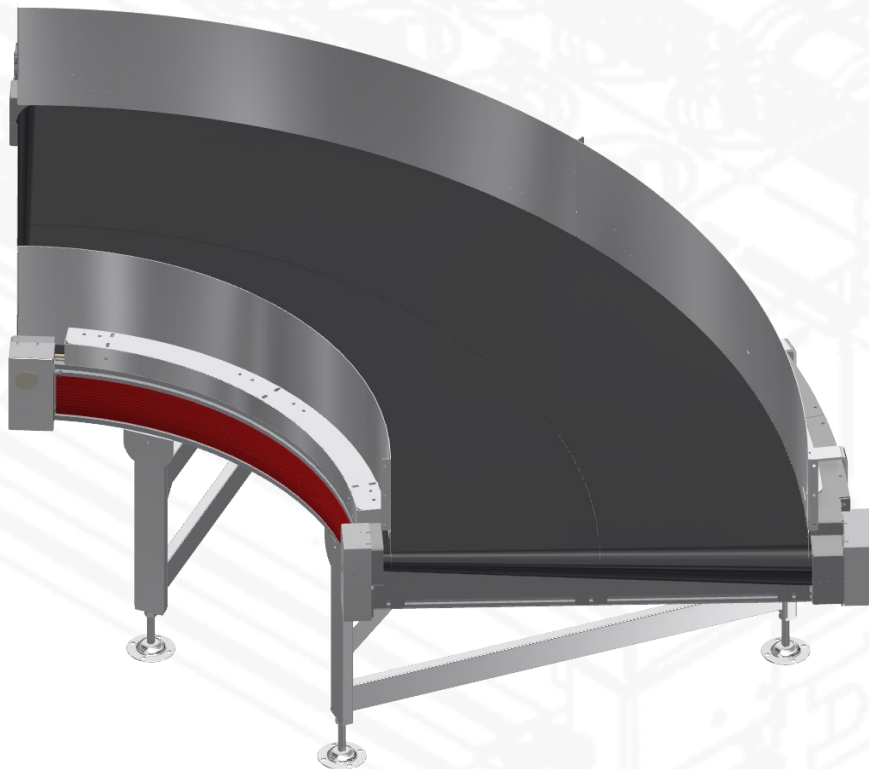



Belt Curve FB2

- ♦ Applications: Express courier/Airport/Logistics
- ♦ Bidirectional
- ♦ Capacity: max. 75 Kg (according to the speed)
- ♦ Speed: max. 3 m/s
- ♦ Aluminium structure
- ♦ Side guides: optional
- ♦ Support stands: optional
- ♦ Useful width: 800 - 900 - 1000 - 1100 - 1200 - 1300 - 1400 - 1500 mm
- ♦ Rubberized conical drums
- ♦ Rotation angle: 15 - 30 - 45 - 60 - 90°

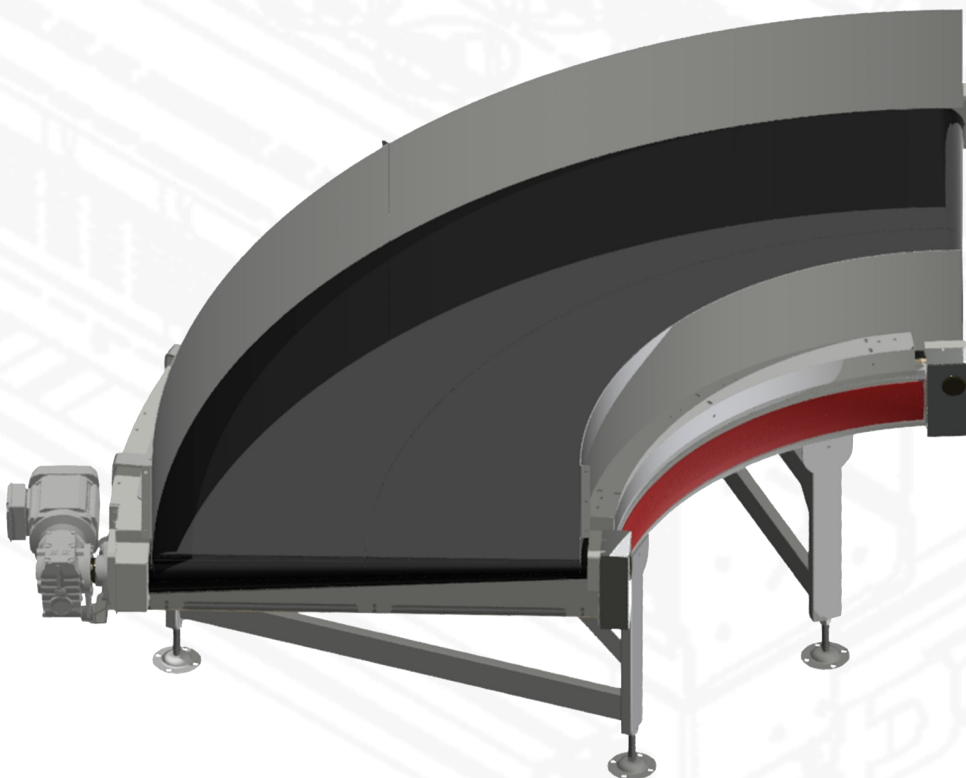

Belt Curve



HEAD OFFICE

Via Marconi, 38 - 27010 - Vellezzo Bellini, Pavia - Italy

Phone: +39 0382 1571022

Email: sales@mms-srl.com

Web: www.mms-motion.com